




## 8P006300

3-Wege-Kugelhahn, aus Vollmaterial, "T" oder "L" Bohrung, vierseitige Kugeldichtung, voller Durchgang, Anschlüsse Innengewinde ISO 228, aus Edelstahl AISI 316, mit Antrieb.

### Technische Spezifikationen

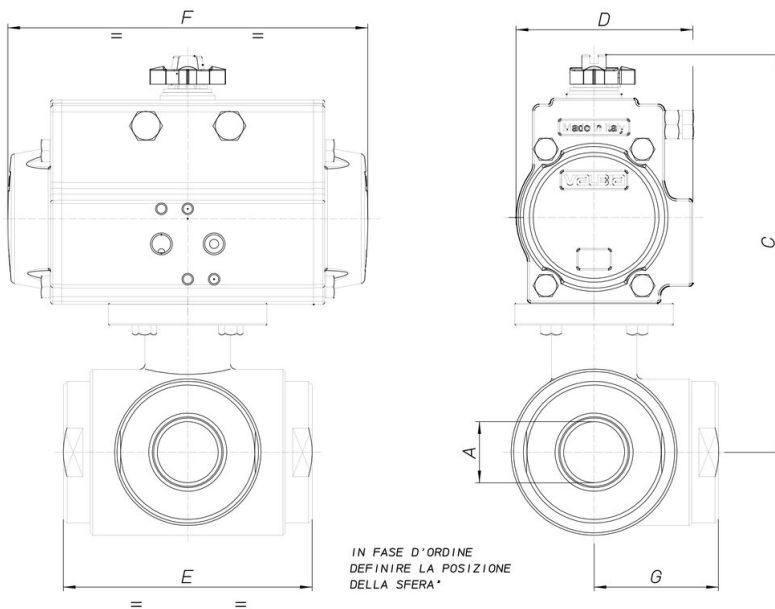

<b>MOD</b>	<b>PN</b>	<b>A</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>ACT.</b>
8P00630002	40	1/4"	148	71	72	141	36	DA 52
8P00630003	40	3/8"	148	71	72	141	36	DA 52
8P00630004	40	1/2"	151	71	82	141	41	DA 52
8P00630005	40	3/4"	170	81	92	164	46	DA 63
8P00630006	40	1"	174	81	102	164	51	DA 63
8P00630007	40	1"1/4	195	81	118	164	59	DA 63
8P00630008	40	1"1/2	220	95	134	210	67	DA 75
8P00630010	25	2"	237	106	144	241	72	DA 85
8P00630012	25	2" 1/2	247	106	160	241	80	DA 85
8P00630014	16	3"	274	123	200	275	100	DA 100
8P00630018	16	4"	289	123	240	275	120	DA 100