




8P006400

3-Wege-Kugelhahn, aus Vollmaterial, "T" oder "L" Bohrung, vierseitige Kugeldichtung, voller Durchgang, Anschlüsse Innengewinde ISO 228, aus Edelstahl AISI 316, mit Antrieb.

Technische Spezifikationen

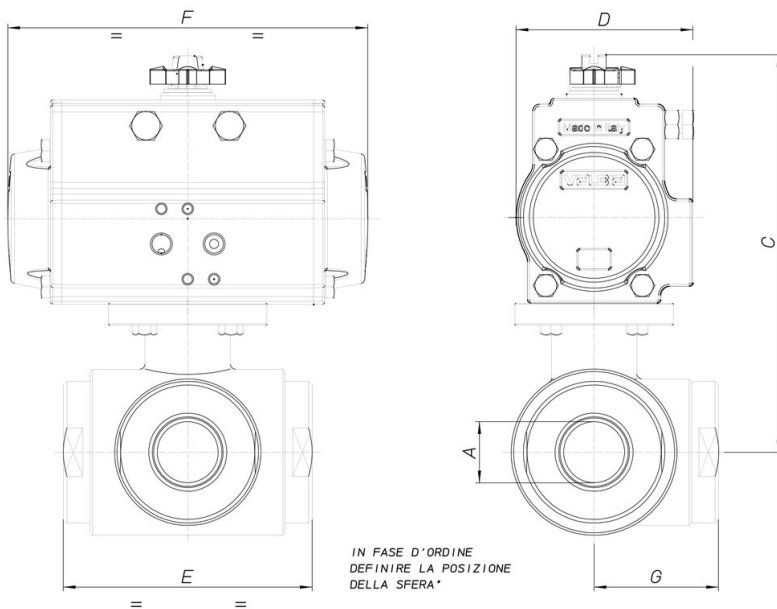

| MOD | PN | A | C | D | E | F | G | ACT. |
|------------|-----------|----------|----------|----------|----------|----------|----------|-------------|
| 8P00640002 | 40 | 1/4" | 148 | 71 | 72 | 141 | 36 | DA 52 |
| 8P00640003 | 40 | 3/8" | 148 | 71 | 72 | 141 | 36 | DA 52 |
| 8P00640004 | 40 | 1/2" | 151 | 71 | 82 | 141 | 41 | DA 52 |
| 8P00640005 | 40 | 3/4" | 170 | 81 | 92 | 164 | 46 | DA 63 |
| 8P00640006 | 40 | 1" | 174 | 81 | 102 | 164 | 51 | DA 63 |
| 8P00640007 | 40 | 1"1/4 | 195 | 81 | 118 | 164 | 59 | DA 63 |
| 8P00640008 | 40 | 1"1/2 | 220 | 95 | 134 | 210 | 67 | DA 75 |
| 8P00640010 | 25 | 2" | 237 | 106 | 144 | 241 | 72 | DA 85 |
| 8P00640012 | 25 | 2" 1/2 | 247 | 106 | 160 | 241 | 80 | DA 85 |
| 8P00640014 | 16 | 3" | 274 | 123 | 200 | 275 | 100 | DA 100 |
| 8P00640018 | 16 | 4" | 289 | 123 | 240 | 275 | 120 | DA 100 |