




## 8P006800

3-Wege-Kugelhahn, aus Vollmaterial, "T" oder "L" Bohrung, vierseitige Kugeldichtung, voller Durchgang, Anschlüsse Innengewinde ISO 228, aus Edelstahl AISI 316, mit Antrieb.

### Technische Spezifikationen

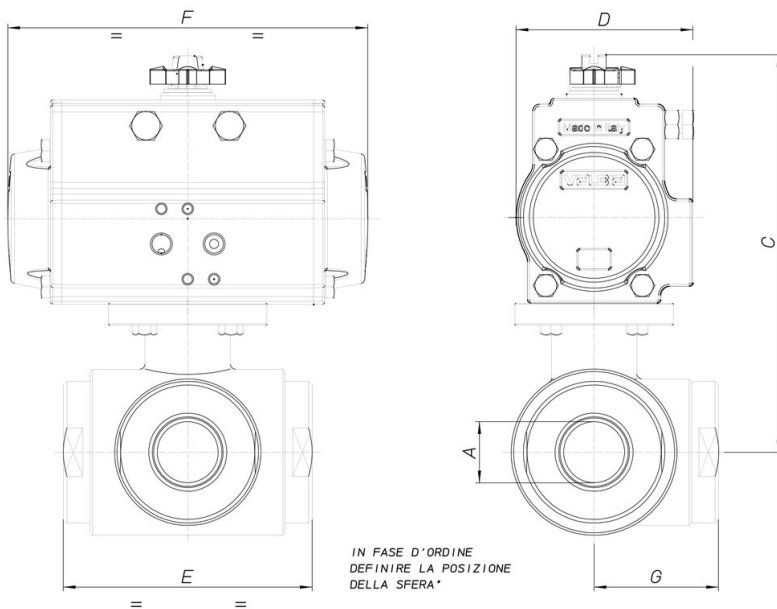

<b>MOD</b>	<b>PN</b>	<b>A</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>ACT.</b>
8P00680002	40	1/4"	210	81	72	164	36	SR 63
8P00680003	40	3/8"	210	81	72	164	36	SR 63
8P00680004	40	1/2"	212	81	82	164	41	SR 63
8P00680005	40	3/4"	202	106	92	241	46	SR 85
8P00680006	40	1"	206	106	102	241	51	SR 85
8P00680007	40	1"1/4	227	106	118	241	59	SR 85
8P00680008	40	1"1/2	247	123	134	275	67	SR 100
8P00680010	25	2"	250	123	144	275	72	SR 100
8P00680012	25	2" 1/2	297	137	160	333	80	SR 115
8P00680014	16	3"	321	148	200	372	100	SR 125
8P00680018	16	4"	358	164	240	435	120	SR 140