


8E051



3-Wege-Kugelhahn aus 9SMnPb36, "T" oder "L" Bohrung, Ablenker, Gewindeanschluß I/I/I, für Hochdruck, mit elektrischem Antrieb, für Hydrauliköl, Emulsion.nFür besondere Anwendungen, bitte kontaktieren Sie unser Vertriebsbüro.

Technische Spezifikationen

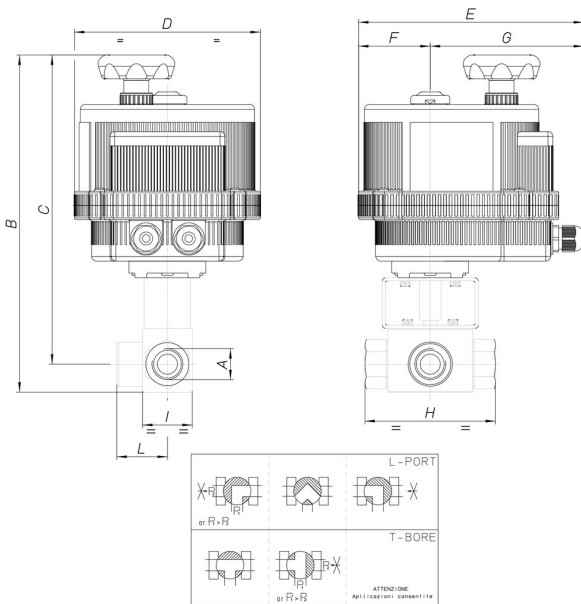

MOD	PN	A	B	C	D	E	F	G	H	I	L	ACT.	RI
8E05100103	400	3/8"	268	250	157	191	61	130	73	35	37	VB 030	3740
8E05100203	400	3/8"	268	250	157	191	61	130	73	35	37	VB 030	3740
8E05100403	400	3/8"	268	250	157	191	61	130	73	35	37	VB 030	3740
8E05100104	350	1/2"	271	253	157	191	61	130	83	37	40	VB 030	3740
8E05100204	350	1/2"	271	253	157	191	61	130	83	37	40	VB 030	3740
8E05100404	350	1/2"	271	253	157	191	61	130	83	37	40	VB 030	3740
8E05100105	350	3/4"	283	260	157	191	61	130	95	45	52	VB 030	4037
8E05100205	350	3/4"	283	260	157	191	61	130	95	45	52	VB 030	4037
8E05100405	350	3/4"	283	260	157	191	61	130	95	45	52	VB 030	4037
8E05100106	350	1"	320	291	185	215	68	147	112	55	60	VB 060	4038
8E05100206	350	1"	320	291	185	215	68	147	112	55	60	VB 060	4038
8E05100406	350	1"	320	291	185	215	68	147	112	55	60	VB 060	4038