


## 8P022000

3 ways ball valve, from ingot, 4 PTFE seals, AISI 316, polished, DIN 11851 connection F/F/F, full bore, T or L port, with actuator.



### Technical specifications

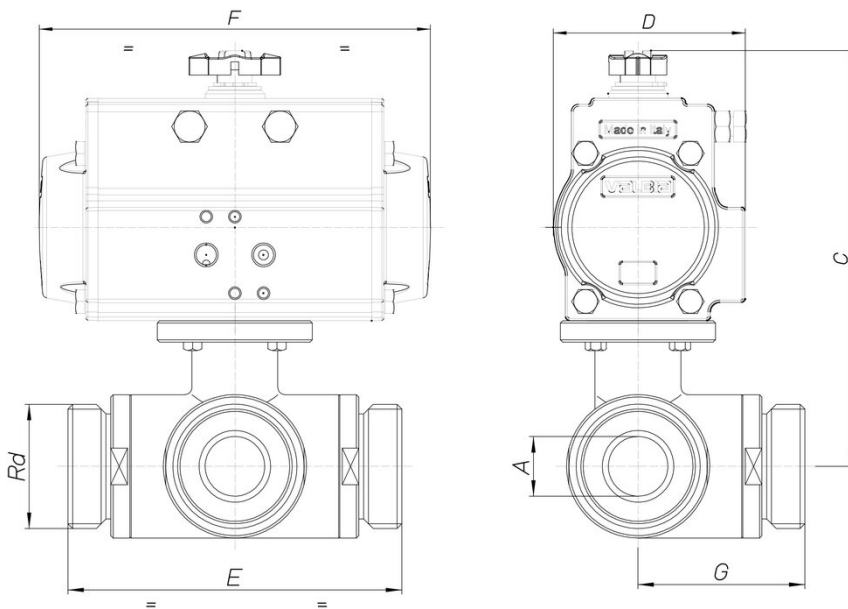

| <b>MOD</b> | <b>PN</b> | <b>A</b> | <b>RD</b> | <b>C</b> | <b>D</b> | <b>E</b> | <b>F</b> | <b>G</b> | <b>ACT.</b> |
|------------|-----------|----------|-----------|----------|----------|----------|----------|----------|-------------|
| 8P02200003 | 40        | 10       | 28x1/8"   | 210      | 81       | 108      | 164      | 54       | SR 63       |
| 8P02200004 | 40        | 15       | 34x1/8"   | 212      | 81       | 118      | 164      | 59       | SR 63       |
| 8P02200005 | 40        | 20       | 44x1/6"   | 202      | 106      | 130      | 241      | 65       | SR 85       |
| 8P02200006 | 40        | 25       | 52x1/6"   | 206      | 106      | 140      | 241      | 70       | SR 85       |
| 8P02200007 | 40        | 32       | 58x1/6"   | 227      | 106      | 156      | 241      | 78       | SR 85       |
| 8P02200008 | 40        | 40       | 65x1/6"   | 247      | 123      | 172      | 275      | 86       | SR 100      |
| 8P02200010 | 25        | 50       | 78x1/6"   | 250      | 123      | 182      | 275      | 91       | SR 100      |
| 8P02200012 | 25        | 65       | 95x1/6"   | 294      | 137      | 196      | 333      | 98       | SR 115      |
| 8P02200014 | 16        | 80       | 110x1/4"  | 321      | 148      | 256      | 372      | 128      | SR 125      |
| 8P02200018 | 16        | 100      | 130x1/4"  | 358      | 164      | 286      | 435      | 143      | SR 140      |