


## 8P026400

2 way stainless steel valve AISI 316, polished, seals in PTFE, threaded F/F, with actuator.



### Technical specifications

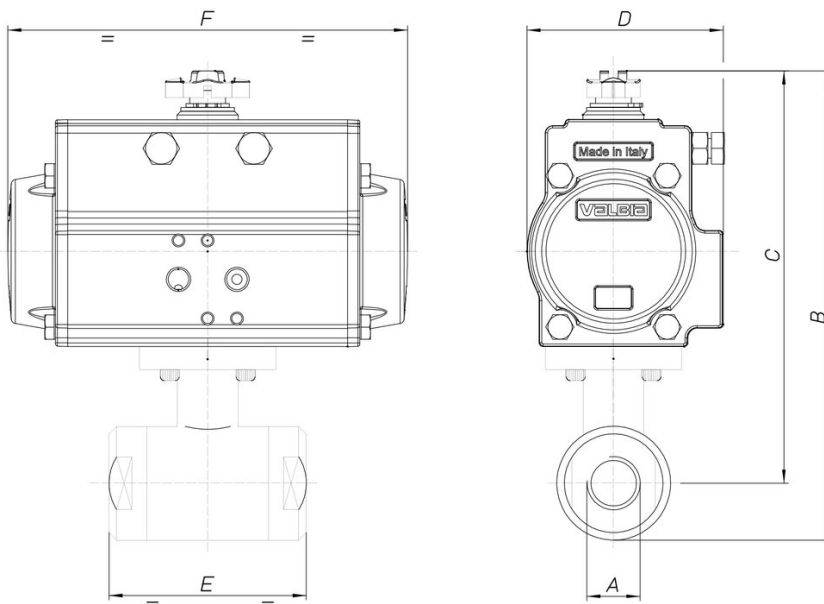

| <b>MOD</b> | <b>PN</b> | <b>A</b> | <b>B</b> | <b>C</b> | <b>D</b> | <b>E</b> | <b>F</b> | <b>ACT.</b> |
|------------|-----------|----------|----------|----------|----------|----------|----------|-------------|
| 8P02640002 | 64        | 1/4"     | 156      | 141      | 71       | 52       | 141      | SR 52       |
| 8P02640003 | 64        | 3/8"     | 156      | 141      | 71       | 52       | 141      | SR 52       |
| 8P02640004 | 64        | 1/2"     | 161      | 143      | 71       | 62       | 141      | SR 52       |
| 8P02640005 | 64        | 3/4"     | 168      | 147      | 71       | 72       | 141      | SR 52       |
| 8P02640006 | 40        | 1"       | 223      | 197      | 106      | 82       | 241      | SR 85       |
| 8P02640007 | 40        | 1"1/4    | 232      | 202      | 106      | 92       | 241      | SR 85       |
| 8P02640008 | 40        | 1"1/2    | 259      | 222      | 106      | 104      | 241      | SR 85       |
| 8P02640010 | 25        | 2"       | 275      | 230      | 106      | 116      | 241      | SR 85       |
| 8P02640012 | 25        | 2"1/2    | 309      | 253      | 123      | 128      | 275      | SR 100      |
| 8P02640014 | 25        | 3"       | 377      | 311      | 148      | 150      | 372      | SR 125      |
| 8P02640018 | 25        | 4"       | 407      | 325      | 148      | 178      | 372      | SR 125      |