




## 8E052

3 ways ball valve, 9SMnPb36, "L" or "T" port, diverting only, F/F/F threaded, for high pressure, with electric actuator. For hydraulic oil, emulsion. For particular applications, refer to Valbia.

### Technical specifications

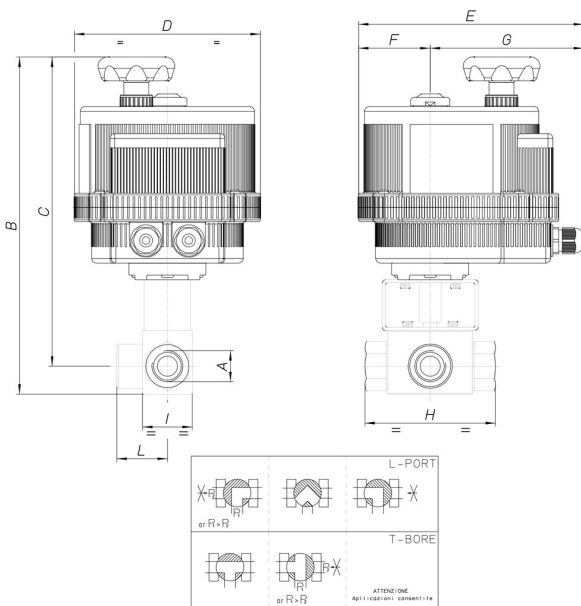

<b>MOD</b>	<b>PN</b>	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>H</b>	<b>I</b>	<b>L</b>	<b>ACT.</b>	<b>RI</b>
8E05200103	400	3/8"	268	250	157	191	61	130	73	35	37	VB 030	3740
8E05200203	400	3/8"	268	250	157	191	61	130	73	35	37	VB 030	3740
8E05200403	400	3/8"	268	250	157	191	61	130	73	35	37	VB 030	3740
8E05200104	350	1/2"	271	253	157	191	61	130	83	37	40	VB 030	3740
8E05200204	350	1/2"	271	253	157	191	61	130	83	37	40	VB 030	3740
8E05200404	350	1/2"	271	253	157	191	61	130	83	37	40	VB 030	3740
8E05200105	350	3/4"	283	260	157	191	61	130	95	45	52	VB 030	4037
8E05200205	350	3/4"	283	260	157	191	61	130	95	45	52	VB 030	4037
8E05200405	350	3/4"	283	260	157	191	61	130	95	45	52	VB 030	4037
8E05200106	350	1"	320	291	185	215	68	147	112	55	60	VB 060	4038
8E05200206	350	1"	320	291	185	215	68	147	112	55	60	VB 060	4038
8E05200406	350	1"	320	291	185	215	68	147	112	55	60	VB 060	4038