


8E144



3 way ball valve, from ingot, AISI 316, clamp connections ISO 2852, DIN 32676 TABLE 4 REIHE C for tube BS/OD (ASTM A270), 4 P.T.F.E. seals, polished, full bore or reduced bore, "T" or "L" port, with electric actuator series 85.

Technical specifications

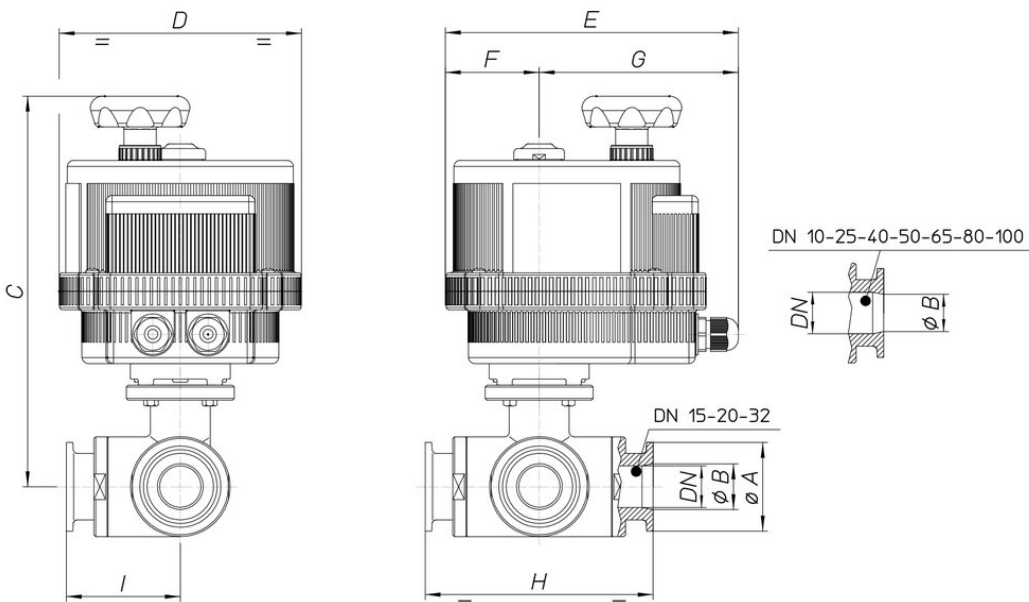

| MOD | PN | ØA | ØB | C | D | E | F | G | H | I | ACT. |
|------------|----|-----|------|-----|-----|-----|----|-----|-----|-----|---------|
| 8E14400103 | 40 | 25 | 9,7 | 188 | 123 | 164 | 43 | 121 | 108 | 54 | VB 015 |
| 8E14400203 | 40 | 25 | 9,7 | 188 | 123 | 164 | 43 | 121 | 108 | 54 | VB 015 |
| 8E14400403 | 40 | 25 | 9,7 | 188 | 123 | 164 | 43 | 121 | 108 | 54 | VB 015 |
| 8E14400104 | 40 | 25 | 16 | 191 | 123 | 164 | 43 | 121 | 118 | 59 | VB 015 |
| 8E14400204 | 40 | 25 | 16 | 191 | 123 | 164 | 43 | 121 | 118 | 59 | VB 015 |
| 8E14400404 | 40 | 25 | 16 | 191 | 123 | 164 | 43 | 121 | 118 | 59 | VB 015 |
| 8E14400105 | 40 | 51 | 22,2 | 245 | 157 | 191 | 61 | 130 | 130 | 65 | VB 030* |
| 8E14400205 | 40 | 51 | 22,2 | 245 | 157 | 191 | 61 | 130 | 130 | 65 | VB 030* |
| 8E14400405 | 40 | 51 | 22,2 | 245 | 157 | 191 | 61 | 130 | 130 | 65 | VB 030* |
| 8E14400107 | 40 | 51 | 34,8 | 297 | 185 | 215 | 68 | 147 | 156 | 78 | VB 060 |
| 8E14400207 | 40 | 51 | 34,8 | 297 | 185 | 215 | 68 | 147 | 156 | 78 | VB 060 |
| 8E14400407 | 40 | 51 | 34,8 | 297 | 185 | 215 | 68 | 147 | 156 | 78 | VB 060 |
| 8E14400110 | 25 | 64 | 47,5 | 307 | 185 | 215 | 68 | 147 | 182 | 91 | VB 060* |
| 8E14400210 | 25 | 64 | 47,5 | 307 | 185 | 215 | 68 | 147 | 182 | 91 | VB 060* |
| 8E14400410 | 25 | 64 | 47,5 | 307 | 185 | 215 | 68 | 147 | 182 | 91 | VB 060* |
| 8E14400112 | 25 | 78 | 60,2 | 334 | 211 | 237 | 84 | 153 | 196 | 98 | VB 110 |
| 8E14400212 | 25 | 78 | 60,2 | 334 | 211 | 237 | 84 | 153 | 196 | 98 | VB 110 |
| 8E14400412 | 25 | 78 | 60,2 | 334 | 211 | 237 | 84 | 153 | 196 | 98 | VB 110 |
| 8E14400114 | 16 | 91 | 72,6 | 348 | 211 | 237 | 84 | 153 | 256 | 128 | VB 190 |
| 8E14400214 | 16 | 91 | 72,6 | 348 | 211 | 237 | 84 | 153 | 256 | 128 | VB 190 |
| 8E14400414 | 16 | 91 | 72,6 | 348 | 211 | 237 | 84 | 153 | 256 | 128 | VB 190 |
| 8E14400118 | 16 | 119 | 97,6 | 365 | 222 | 247 | 77 | 170 | 286 | 143 | VB 350 |
| 8E14400218 | 16 | 119 | 97,6 | 365 | 222 | 247 | 77 | 170 | 286 | 143 | VB 350 |
| 8E14400418 | 16 | 119 | 97,6 | 365 | 222 | 247 | 77 | 170 | 286 | 143 | VB 350 |