


8M263



Split Body [Valpres art. 760V00] full bore flanged PN16 ball valve, stainless steel AISI A351-CF8M, V-Pack stem seal, EN 558 basic series 27 face to face to dimension, Fire Safe, Antistatic Device. With electric actuator series 86.

NEW

Technical specifications

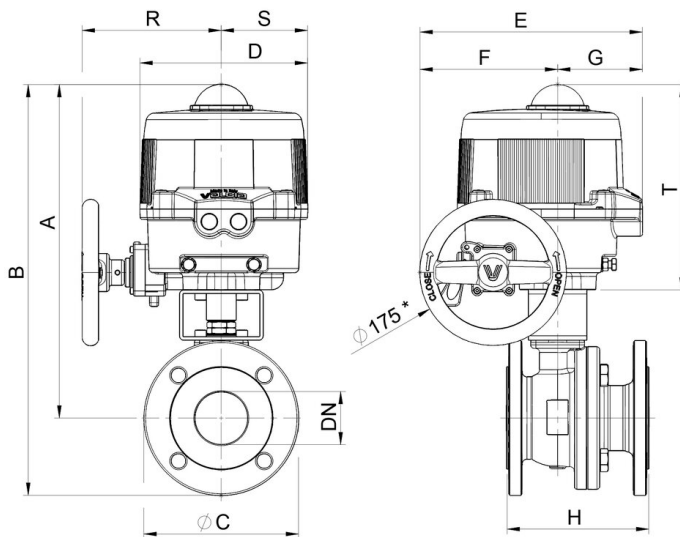

* mod.VB030M-VB060M Q10mm SENZA VOLANTINO - without handwheel

MOD	PN	A	B	C	D	E	F	G	H	R	S	T	ACT.	KIT
8M26300106	40	304	362	115	161	187	63	124	125	-	-	199	VB 030M	RI3520
8M26300206	40	304	362	115	161	187	63	124	125	-	-	199	VB 030M	RI3520
8M26300406	40	304	362	115	161	187	63	124	125	-	-	199	VB 030M	RI3520
8M26300107	40	329	399	140	176	197	63	134	130	-	-	220	VB 060M	RI3525
8M26300207	40	329	399	140	176	197	63	134	130	-	-	220	VB 060M	RI3525
8M26300407	40	329	399	140	176	197	63	134	130	-	-	220	VB 060M	RI3525
8M26300108	40	357	432	150	176	197	63	134	140	-	-	220	VB 060M	RI3521
8M26300208	40	357	432	150	176	197	63	134	140	-	-	220	VB 060M	RI3521
8M26300408	40	357	432	150	176	197	63	134	140	-	-	220	VB 060M	RI3521
8M26300110	40	364	446	165	176	197	63	134	150	-	-	220	VB 060M	RI4039
8M26300210	40	364	446	165	176	197	63	134	150	-	-	220	VB 060M	RI4039
8M26300410	40	364	446	165	176	197	63	134	150	-	-	220	VB 060M	RI4039
8M26300112	16	400	492	185	206	266	165	101	170	167	103	246	VB 110M	RI3522
8M26300212	16	400	492	185	206	266	165	101	170	167	103	246	VB 110M	RI3522
8M26300412	16	400	492	185	206	266	165	101	170	167	103	246	VB 110M	RI3522
8M26300114	16	434	534	200	206	266	165	101	180	167	103	246	VB 110M	RI3523
8M26300214	16	434	534	200	206	266	165	101	180	167	103	246	VB 110M	RI3523
8M26300414	16	434	534	200	206	266	165	101	180	167	103	246	VB 110M	RI3523
8M26300118	16	448	558	220	206	266	165	101	190	167	103	246	VB 190M	RI3552
8M26300218	16	448	558	220	206	266	165	101	190	167	103	246	VB 190M	RI3552
8M26300418	16	448	558	220	206	266	165	101	190	167	103	246	VB 190M	RI3552
8M26300119	16	471	596	250	218	279	184	95	325	166	109	247	VB 270M	RI3528
8M26300219	16	471	596	250	218	279	184	95	325	166	109	247	VB 270M	RI3528
8M26300419	16	471	596	250	218	279	184	95	325	166	109	247	VB 270M	RI3528
8M26300120	16	504	647	285	218	279	184	95	350	166	109	247	VB 350M	RI3553
8M26300220	16	504	647	285	218	279	184	95	350	166	109	247	VB 350M	RI3553
8M26300420	16	504	647	285	218	279	184	95	350	166	109	247	VB 350M	RI3553