


## 8P025500



Valvola a sfera 3 vie ricavata da massello, 4 guarnizioni in P.T.F.E. vergine, lucida, acciaio inox AISI 316 passaggio totale e ridotto, sfera forata a 45° o 90°, attacchi clamp ISO 2852, DIN 32676 TAB.4 REIHE C per tubo BS/OD (ASTM A270).

### Specifiche tecniche

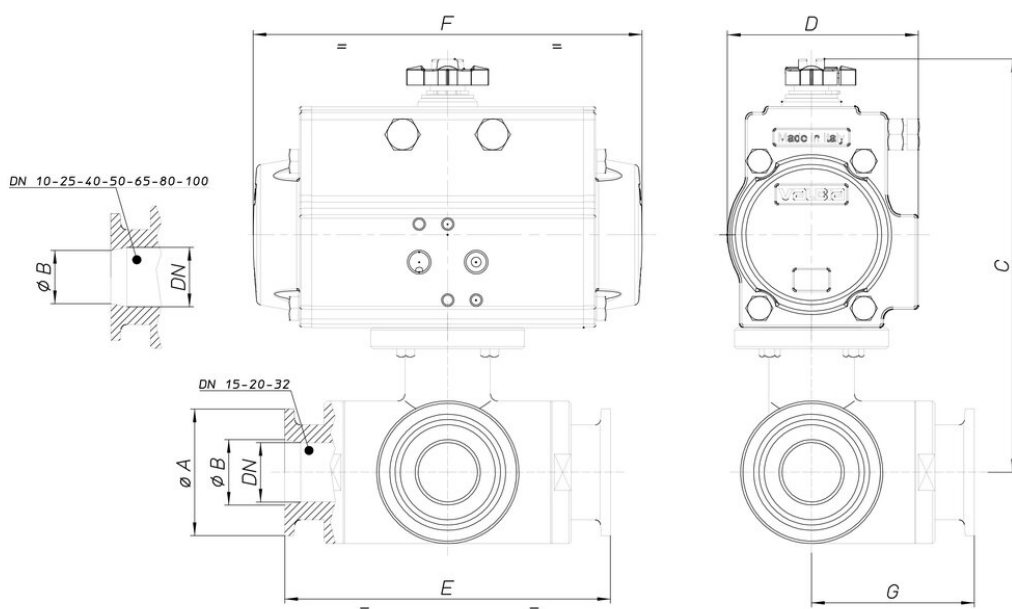

| <b>MOD</b> | <b>PN</b> | <b>ØA</b> | <b>ØB</b> | <b>C</b> | <b>D</b> | <b>E</b> | <b>F</b> | <b>G</b> | <b>ACT.</b> |
|------------|-----------|-----------|-----------|----------|----------|----------|----------|----------|-------------|
| 8P02550003 | 40        | 25        | 9,7       | 148      | 71       | 108      | 141      | 54       | DA 52       |
| 8P02550004 | 40        | 25        | 16        | 151      | 71       | 118      | 141      | 59       | DA 52       |
| 8P02550005 | 40        | 51        | 22,2      | 170      | 81       | 130      | 164      | 65       | DA 63       |
| 8P02550007 | 40        | 51        | 34,8      | 195      | 81       | 156      | 164      | 78       | DA 63       |
| 8P02550010 | 25        | 64        | 47,5      | 237      | 106      | 182      | 241      | 91       | DA 85       |
| 8P02550012 | 25        | 78        | 60,2      | 247      | 106      | 196      | 241      | 98       | DA 85       |
| 8P02550014 | 16        | 91        | 72,6      | 274      | 123      | 256      | 275      | 128      | DA 100      |
| 8P02550018 | 16        | 119       | 97,6      | 289      | 123      | 286      | 275      | 143      | DA 100      |