


## 8P028600



Valvola a sfera 3 vie [Valpres artt. 776600 (T) - 776601 (L)], con 4 guarnizioni, sfera forata a T o L, flangiata PN16, acciaio al carbonio ASTM A105, passaggio totale con dispositivo antistatico.

### Specifiche tecniche

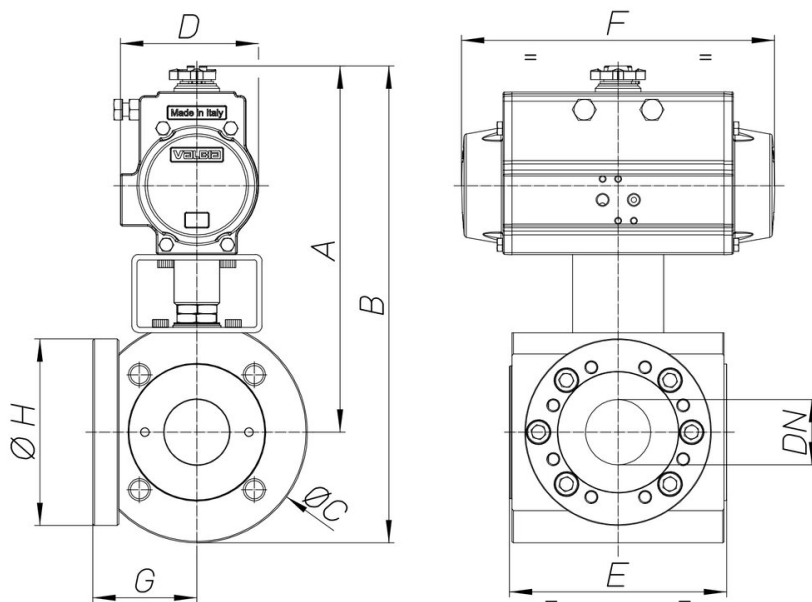

| <b>MOD</b> | <b>PN</b> | <b>A</b> | <b>B</b> | <b>ØC</b> | <b>D</b> | <b>E</b> | <b>F</b> | <b>G</b> | <b>ØH</b> | <b>ACT.</b> | <b>RI</b> |
|------------|-----------|----------|----------|-----------|----------|----------|----------|----------|-----------|-------------|-----------|
| 8P02860004 | 16        | 187      | 231      | 88        | 71       | 99       | 141      | 32       | /         | DA 52       | 4408      |
| 8P02860005 | 16        | 217      | 267      | 100       | 81       | 108      | 164      | 40       | /         | DA 63       | 3563      |
| 8P02860006 | 16        | 222      | 277      | 109       | 81       | 115      | 164      | 41,5     | /         | DA 63       | 3563      |
| 8P02860007 | 16        | 253      | 318      | 133       | 95       | 140      | 210      | 52,5     | /         | DA 75       | 4410      |
| 8P02860008 | 16        | 260      | 335      | 150       | 95       | 150      | 210      | 56,5     | /         | DA 75       | 3522      |
| 8P02860010 | 16        | 282      | 367      | 168       | 106      | 167      | 241      | 62       | /         | DA 85       | 3522      |
| 8P02860012 | 16        | 306      | 411      | 208       | 123      | 185      | 275      | 70       | /         | DA 100      | 4411      |
| 8P02860014 | 16        | 380      | 495      | 229       | 137      | 216      | 333      | 127      | 212       | DA 115      | 4412      |
| 8P02860018 | 16        | 376      | 515      | 278       | 137      | 244      | 333      | 150      | 239       | DA 115      | 4412      |