




8E129

Valvola a sfera 3 vie, in acciaio AISI 316L con sfera forata a "L" o "T", solo deviatrice, filettata F/F/F, per alta pressione, con attuatore elettrico; idonee per olio (idraulico, ecc.) emulsione. Per applicazioni particolari consultare l'ufficio commerciale.

Specifiche tecniche

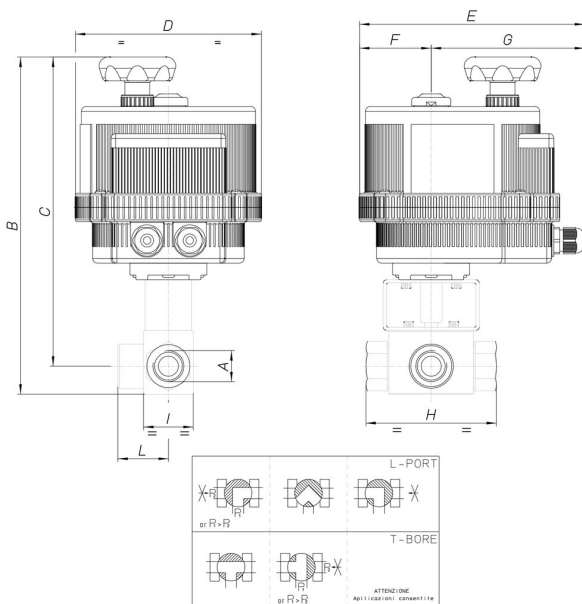

MOD	PN	A	B	C	D	E	F	G	H	I	L	ACT.	KIT
8E12900103	400	3/8"	268	250	157	191	61	130	73	35	37	VB 030	3740
8E12900203	400	3/8"	268	250	157	191	61	130	73	35	37	VB 030	3740
8E12900403	400	3/8"	268	250	157	191	61	130	73	35	37	VB 030	3740
8E12900104	350	1/2"	271	253	157	191	61	130	83	37	40	VB 030	3740
8E12900204	350	1/2"	271	253	157	191	61	130	83	37	40	VB 030	3740
8E12900404	350	1/2"	271	253	157	191	61	130	83	37	40	VB 030	3740
8E12900105	350	3/4"	283	260	157	191	61	130	95	45	52	VB 030	4037
8E12900205	350	3/4"	283	260	157	191	61	130	95	45	52	VB 030	4037
8E12900405	350	3/4"	283	260	157	191	61	130	95	45	52	VB 030	4037
8E12900106	350	1"	320	291	185	215	68	147	112	55	60	VB 060	4038
8E12900206	350	1"	320	291	185	215	68	147	112	55	60	VB 060	4038
8E12900406	350	1"	320	291	185	215	68	147	112	55	60	VB 060	4038