


## 8M052

Valvola a sfera 3 vie in 9SMnPb36, solo deviatrice con sfera forata a T o L, filettata F/F/F per alta pressione, idonee per olio (idraulico ecc...), emulsione, gas metano, per applicazioni particolari consultare l'ufficio commerciale.



### Specifiche tecniche

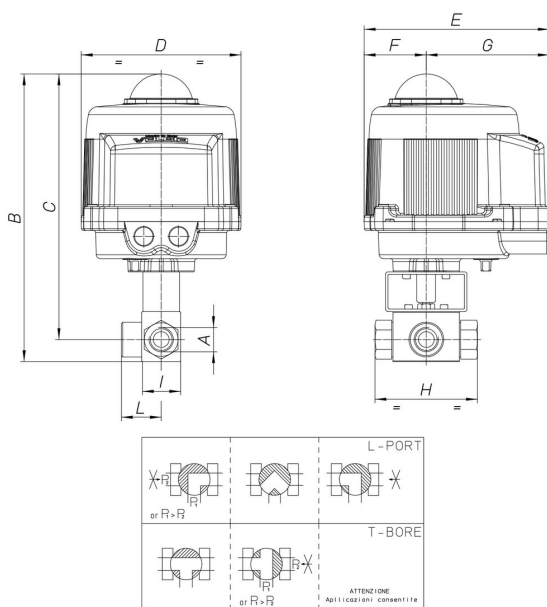

<b>MOD</b>	<b>PN</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>H</b>	<b>I</b>	<b>L</b>	<b>ACT.</b>	<b>KIT</b>
8M05200103	400	279	261	161	187	63	124	73	35	37	VB030M	RI3740
8M05200203	400	279	261	161	187	63	124	73	35	37	VB030M	RI3740
8M05200403	400	279	261	161	187	63	124	73	35	37	VB030M	RI3740
8M05200104	350	282	264	161	187	63	124	83	37	40	VB030M	RI3740
8M05200204	350	282	264	161	187	63	124	83	37	40	VB030M	RI3740
8M05200404	350	282	264	161	187	63	124	83	37	40	VB030M	RI3740
8M05200105	350	294	271	161	187	63	124	95	45	52	VB030M	RI4037
8M05200205	350	294	271	161	187	63	124	95	45	52	VB030M	RI4037
8M05200405	350	294	271	161	187	63	124	95	45	52	VB030M	RI4037
8M05200106	350	325	296	176	197	63	134	112	55	60	VB060M	RI4038
8M05200206	350	325	296	176	197	63	134	112	55	60	VB060M	RI4038
8M05200406	350	325	296	176	197	63	134	112	55	60	VB060M	RI4038